

TECHNICAL SPECIFICATIONS


Labeling Head	Two (2) High-Capacity AE916 Wide Servo Labeling Heads
Media Roll Size	16" Roll
Label Width Capacity	9" Label Width
Controls	15.6" Panel PC HMI with Nita Advanced Productivity Software Package
Conveyor	4" Width × 12' Long Stainless Steel Conveyor
Conveyor Support	9 Adjustable Leg Pads
Rewind System	Motorized Rewind
Gap Sensor	Standard Label Gap Sensor (Opaque Labels Only)
Top Clamping Belt	57" Top Clamping Belt
Label Application	Foam Roller Applicator Kit (2 Foam Rollers)
Status Monitoring	Status Lamp Tower with 2 Low Web Sensors
Product Spacing	Dual Metering Belt
Product Alignment	Pathfinder Anti-Skew Servo Alignment Belts
Changeover Assistance	19 Digital Position Indicators Linked to Nita Recipes
Side Plate Applicators	Heavy Duty Side Plate Applicator Kit (Set of 2)
Wrap Station	12" with Removable Belt Option
Wrap Station Capacity	For Labels 12" Long or Less
Wrap Retraction System	Retractable System to Clear the Foam Roller

TOP VIEW

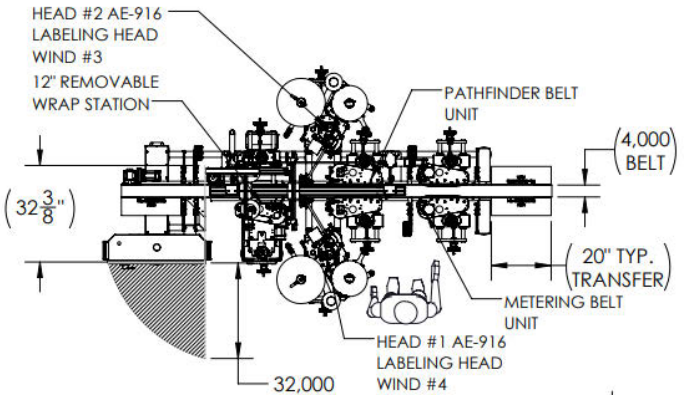

SIDE VIEW

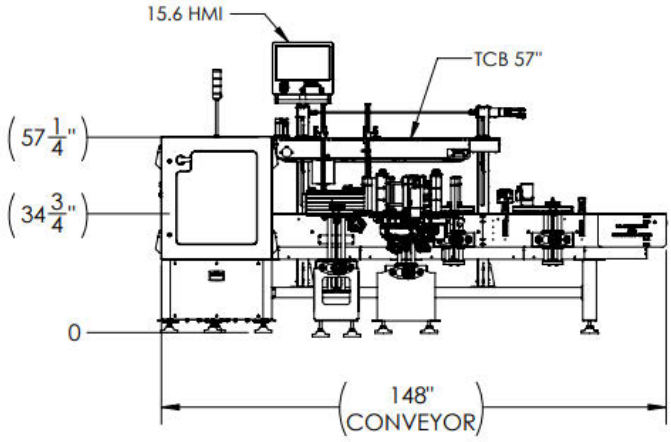

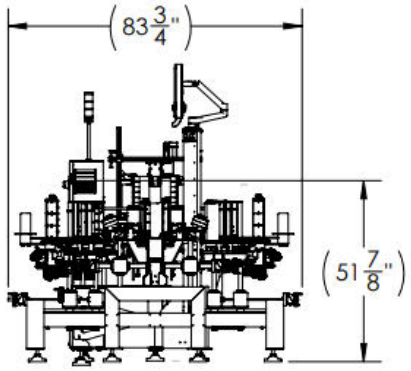

TECHNICAL SPECIFICATIONS (CONT.)

Power Requirements	200-240 VAC, 60 Hz, 3 Phase, 25 Amps
Direction	Right to Left
Total Conveyor Length	18'

INCLUDES

- In-Screen Parts Ordering
- Self-Diagnosing Troubleshooting Guide with Videos
- NitaCare Basic Remote Tech Support Package