
SENTIENT LABELING SYSTEMS


## TECHNICAL SPECIFICATIONS


| | |
|---|---|
| **Labeling Head** | Two (2) High-Capacity AE916 Wide Servo Labeling Heads |
| **Media Roll Size** | 16" Roll |
| **Label Width Capacity** | 9" Label Width |
| **Controls** | 10" Panel PC HMI with Nita Advanced Productivity Software Package |
| **Conveyor** | 4" Width × 12' Long Stainless Steel Conveyor |
| **Conveyor Support** | 9 Adjustable Leg Pads |
| **Rewind System** | Motorized Rewind |
| **Gap Sensor** | Standard Label Gap Sensor (Opaque Labels Only) |
| **Top Clamping Belt** | 57" Top Clamping Belt |
| **Label Application** | Foam Roller Applicator Kit (2 Foam Rollers) |
| **Status Monitoring** | Status Lamp Tower with 2 Low Web Sensors |
| **Product Spacing** | Dual Metering Belt |
| **Product Alignment** | Pathfinder Anti-Skew Servo Alignment Belts |
| **Label Roll Changeover** | Label Roll Splicing Stations (2) |
| **Side Plate Applicators** | Heavy Duty Side Plate Applicator Kit (Set of 2) |
| **Wrap Station** | 12" with Removable Belt Option |
| **Wrap Station Capacity** | For Labels 12" Long or Less |
| **Side Transfers** | 20" Side Transfer (Both Sides) |
| **Power Requirements** | 200-240 VAC, 60 Hz, 3 Phase, 25 Amps |

### TOP VIEW

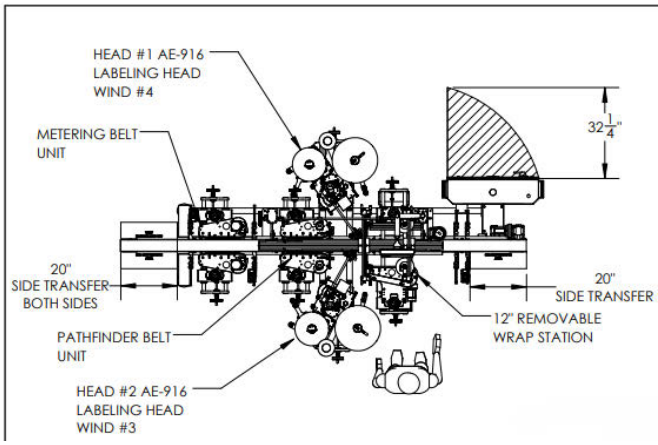


### SIDE VIEW

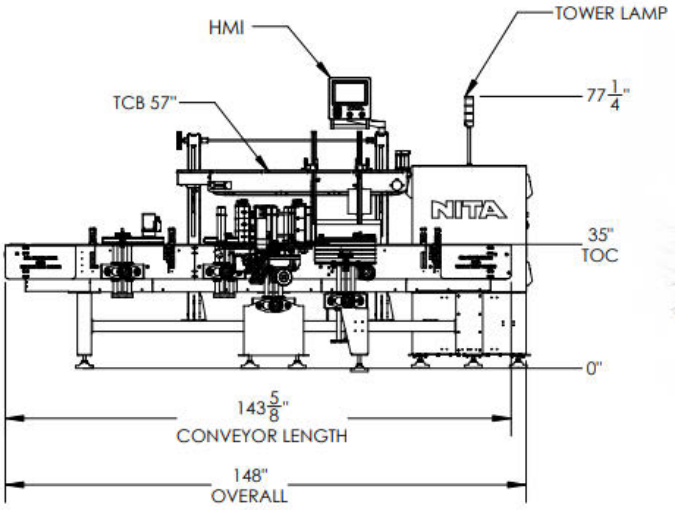
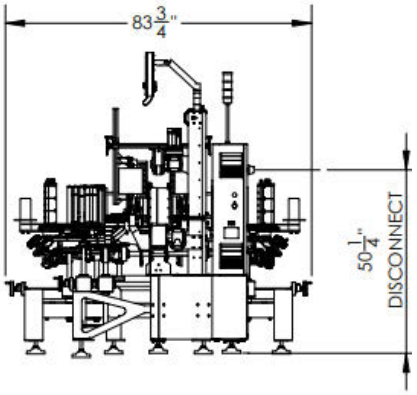
## TECHNICAL SPECIFICATIONS (CONT.)

| | |
|---|---|
| **Direction** | Left to Right |

## INCLUDES

- In-Screen Parts Ordering
- Self-Diagnosing Troubleshooting Guide with Videos
- NitaCare Basic Remote Tech Support Package