NITA
SENTIENT LABELING SYSTEMS


S7000 Rotary Labeler | Pressure Sensitive Wrap

4778


TECHNICAL SPECIFICATIONS


Labeling Heads	4
Speed	Up to 300 BPM
Conveyor	15' Long × 4.5" Wide Motorized Flush-Sided Conveyor
Container Height Range	4" to 14"
Unwind System	18" Powered Unwind
Rewind System	12" Powered Rewind
Web Capacity	7" Maximum Web Width
Turret Stations	16 Servo-Driven Stations with Quick-Change Nests (9" Pitch)
Feed System	Servo-Driven Feed Screw with Selectable Nest Capability
Product Handling	Servo-Driven Infeed Starwheel, Outfeed Starwheel & Main Carousel
Construction	Welded Stainless Steel Frame
Main Frame	3" Stainless Steel Tubular Welded Construction
Safety Guarding	OSHA-Compliant Lexan Guarding
Applicator Drive	Bosch Rexroth Servo Motor & Drive
Label Sensor	Tri-Tronics Ultrasonic Label Sensor
Controls	Allen-Bradley PanelView 5000 HMI
PLC	Allen-Bradley CompactLogix PLC
Power Requirements	208-240 VAC, 3 Phase


TOP VIEW

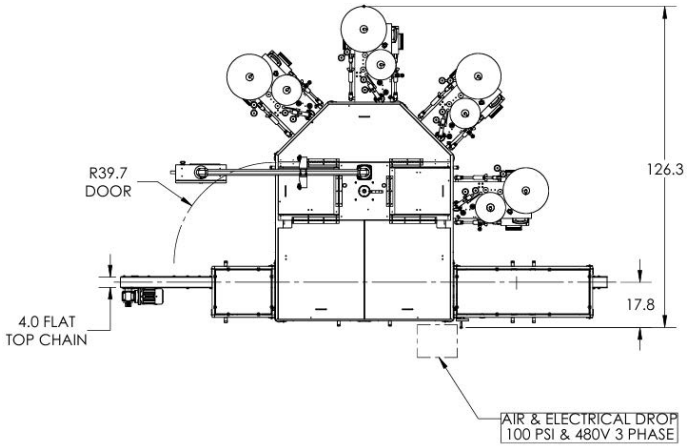

SIDE VIEW

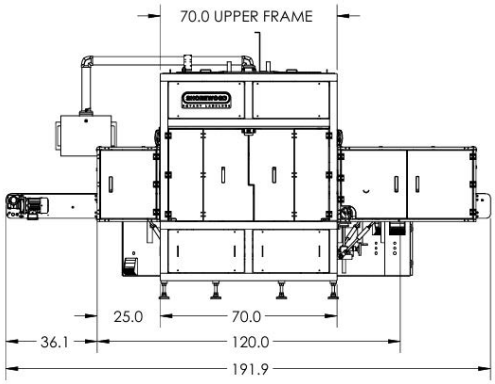

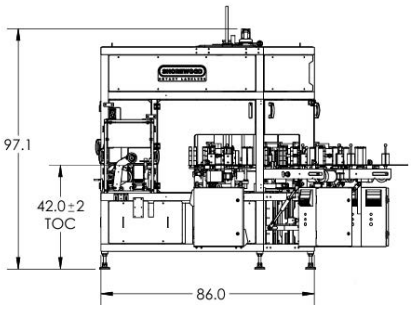

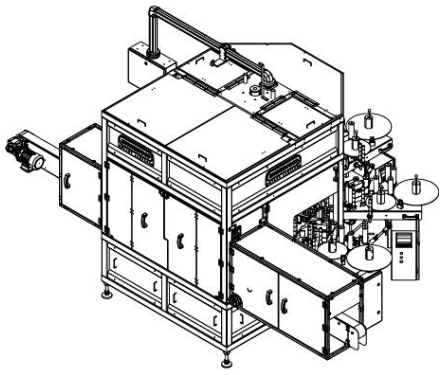

3160 Bd des Entreprises, Terrebonne, Quebec, Canada J6X 4J8 | T. 450.961.4000 | 1.855.668.6482 | sales@nitalabeling.com | www.NitaLabeling.com