

TECHNICAL SPECIFICATIONS


Labeling Heads	Two (2) High-Capacity AE616 Servo Labeling Heads
Media Roll Size	16" Roll
Label Width Capacity	6" Label Width
Controls	15.6" Panel PC HMI with Nita Advanced Productivity Software Package
Conveyor	15.5" Width × 5' (60") Long Stainless Steel Conveyor
Gap Sensor	Standard Label Gap Sensor (Opaque Labels Only)
Product Sensors	4
Rewind System	Motorized Rewind
Power Requirements	200-240 VAC, 60 Hz, 3 Phase, 25 Amps
Metering Conveyor Sections	Two (2) 2.5' Intralox Conveyor Belt Sections
Conveyor Control	Servo Drives and Motors with Two-Speed Product Pitch Control
Conveyor Belt Types	Section 1: Non-Friction Belt; Section 2: Friction Belt
Status Monitoring	Status Lamp Tower with Two (2) Low Web Sensors

TOP VIEW

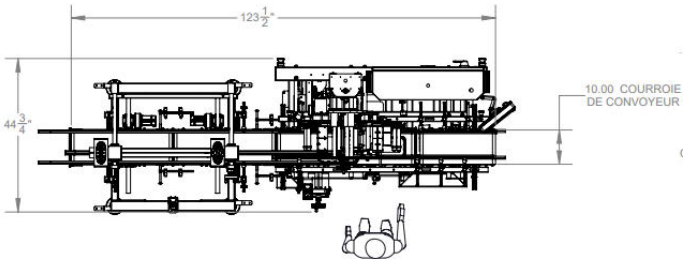

SIDE VIEW

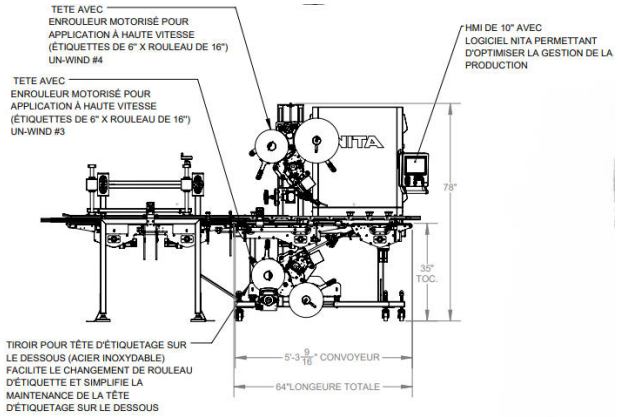



INCLUDES

- In-Screen Parts Ordering & Preventative Maintenance Alerts
- Self-Diagnosing Troubleshooting Guide with Videos
- Drawer for Bottom Labeling Head
- Integrated Product Flow Control Conveyor System
- Fully Integrated with Nita HMI Controls and Recipes
- Brush Kit for Wipe-On Label Application
- Nita Care Basic Remote Tech Support Package