

TECHNICAL SPECIFICATIONS


Labeling Head	High-Capacity AE916 Wide Servo Labeling Head
Media Roll Size	16" Roll
Label Width Capacity	9" Label Width
Controls	15.6" Panel PC HMI with Nita Advanced Productivity Software Package
Conveyor	12" Width × 10' Long Stainless Steel Conveyor
Conveyor Support	9 Adjustable Leg Pads
Conveyor Height Adjustment	TOC Adjustment Range: 34" to 40"
Rewind System	Motorized Rewind
Gap Sensor	Standard Label Gap Sensor (Opaque Labels Only)
Product Orientation	Orienting Device for Pail Handle with Belt, Sensor and Pneumatic Spacing Gate
Handle Retention	Pail Handle Retaining Guides
Top Clamping Belt	57" Top Clamping Belt
Label Application	Double Wipe Gate for Pails
Status Monitoring	Status Lamp Tower with 1 Low Web Sensor
Connectivity	Internet Login Port for Network Connection and E-Servicing

TOP VIEW

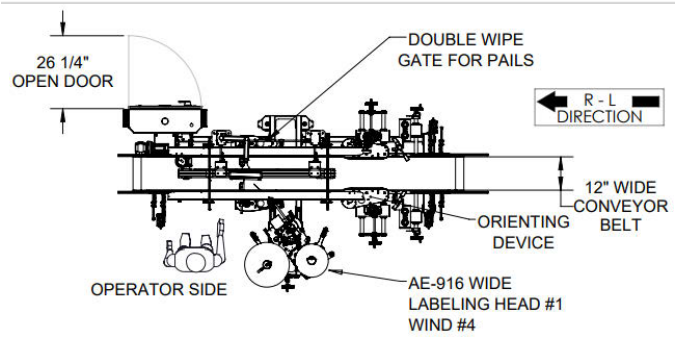

SIDE VIEW

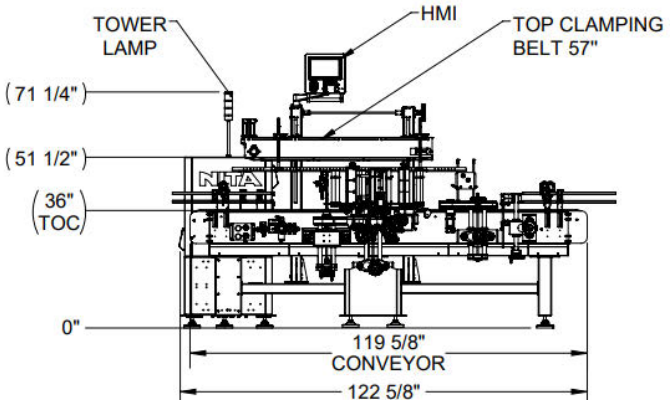

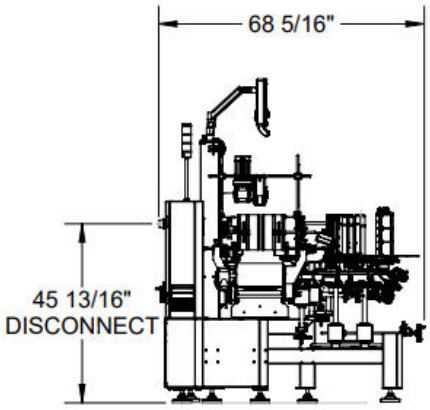

Power Requirements	200-240 VAC, 60 Hz, 3 Phase, 25 Amps
Air Requirements	80 PSI, 2-3 CFM
Direction	Right to Left

INCLUDES

- In-Screen Parts Ordering
- Self-Diagnosing Troubleshooting Guide with Videos
- Pneumatic Shutoff Lockout Valve for Inlet Air Pressure
- Web Break Detector
- NitaCare Basic Remote Tech Support Package